



## Flow Measurement System

The Flow Measurement System measures the flow rate of gas using thermal-dispersion flow measurement technology.

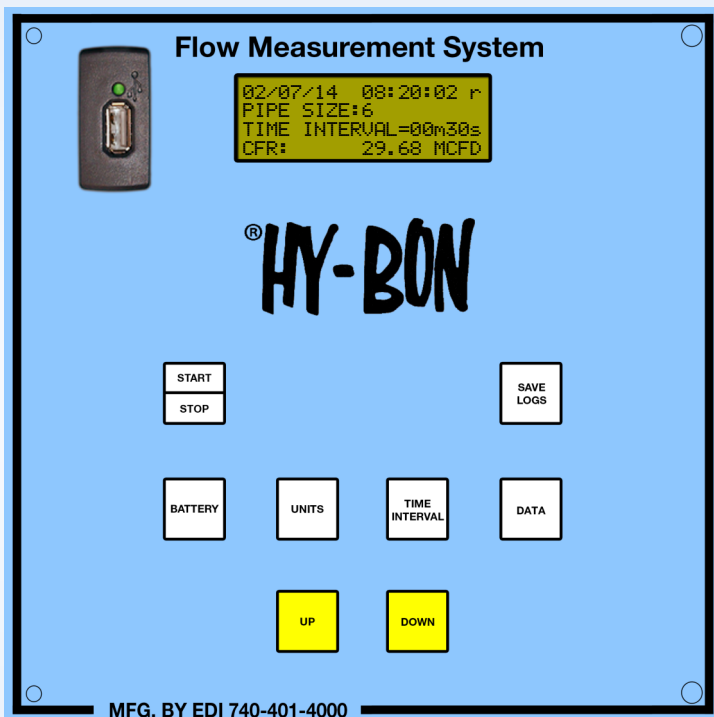

- Flow Rate can be measured in CFM, CFH, MCFH or MCFD
- The current flow rate (CFR) is displayed on the LCD screen
- User defined log interval from 1 second to 10 minutes

- The logs can be saved to a USB key and opened in Excel
- These logs meet the EPA Quad O reporting requirements
- Supports telemetry over cellular, satellite, or radio with RS-232 or RS-485
- Modbus Slave Protocol allows it to communicate with other devices, software and SCADA systems

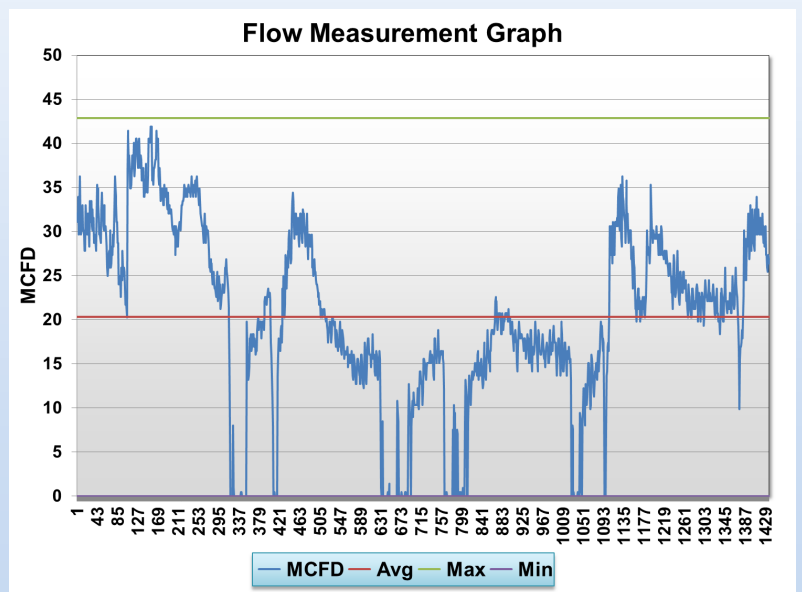

**HY-BON**



**EDI**

**VENT GAS MANAGEMENT**



**Probe Features:**

- Specifically designed to monitor vent gas.
- Can be permanently mounted or used as a portable device
- No moving parts, non-clogging
- Handles gases and liquids
- For use in tubing & piping up to 6" diameter
- Superior low flow sensing (0-100 fps)
- No cavities or dead legs
- Simple, screw-in installation
- Self-contained unit
- **Does not require calibration in the field**
- **Meets EPA Greenhouse Gases Reporting Rule Subpart 'W' requirements**

**HY-BON**



2404 Commerce Drive  
Midland, TX 79703

Phone: (432) 697-2292  
Fax: (432) 697-2310

[www.hy-bon.com](http://www.hy-bon.com)

**Electronic Design for Industry**



100 Ayers Blvd.  
Belpre, OH 45714

Phone: (740) 401-4000  
Fax: (740) 401-4005

[www.ediplungerlift.com](http://www.ediplungerlift.com)

**Service Centers**

Artesia, NM

San Antonio, TX

Weatherford, TX

Oklahoma City, OK

Denver, CO

Dickinson, ND